

HandySwitch[®]

INSTRUCTIONS TO APPLY PROTECTIVE CAP TO YOUR HANDY SWITCH TO CONTAIN FIRE HAZARD



Fire Hazard

You must install the protective cap over your HandySwitch Wireless Remote Light Switch, as instructed, to contain any fire due to overheating of the receiver.

1. Go to your **HandySwitch** Receiver Unit (AC Wall Plug-In Module).
2. Remove the AC Appliance Plug (e.g. table lamp, etc) from the **HandySwitch** receiver.
3. Remove the **HandySwitch** receiver from your wall's AC receptacle.
4. Take the enclosed Protective Cap and align it with the **HandySwitch** receiver module as shown in the Figure 1 below. **NOTE THE NIGHTLIGHT WILL NOT BE VISIBLE** through the Protective CAP's opening.

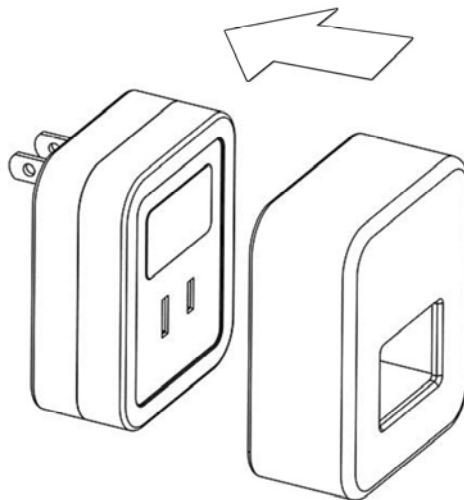


Figure 1

5. Insure the Protective CAP is properly aligned, and carefully slide it onto the **HandySwitch** receiver until it fully snaps securely over the **HandySwitch** receiver with the four locking tabs engaged as shown in Figure 2 below.

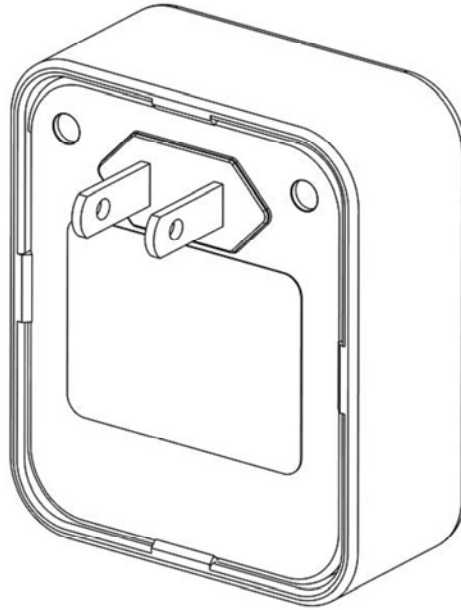


Figure 2

6. Reinstall the **HandySwitch** receiver with the Protective CAP into your wall's AC receptacle.
7. Reinstall your AC Appliance Plug (e.g. table lamp, etc) into the **HandySwitch** receiver with the Protective CAP and verify operation.

www.handyswitchrecall.com

